20000 Tons/Year



# Wholesale Factory Price Tank Cylinder Gas Liquid High Purity Ammonia

## **Basic Information**

. Place of Origin: China . Brand Name: CMC COA · Certification: Model Number: Nh3 • Minimum Order Quantity: 1kg • Price: US \$ 1/kg Cylinder/Tank Packaging Details: • Delivery Time: 15 days Payment Terms: L/C, T/T

# Ammonia. NH<sub>3</sub>



# **Product Specification**

. Supply Ability:

• Product Name: Ammonia Gas • Purity: 99.99999% . Hazard Class: 2.3 • Density(Kg/M3): 0.728 Model No.: Ammonia • Transport Package: 800L, 100L Specification: 800L, 100L Trademark: CMC • Origin: China • HS Code: 28141000 • Supply Ability: 800L, 100L 7664-41-7 · CAS No.: • Formula: Nh3 • EINECS: 231-635-3



# More Images

• Constituent:





Industrial Pure Air





### **Product Description**

# **Product Description**

NH3 refers to ammonia, a chemical compound composed of one nitrogen atom bonded to three hydrogen atoms. Here are some key points about NH3·

Chemical Formula: NH3 Molecular Weight: 17.03 q/mol

Structure: NH3 has a trigonal pyramidal molecular geometry, with the nitrogen atom at the center and the three hydrogen atoms arranged around it.

Physical Properties: Ammonia is a colorless gas with a pungent odor. It has a boiling point of -33.34°C (-28.012°F) and a melting point of -77.73°C (-107.914°F). At room temperature and atmospheric pressure, it is not stable as a solid and exists as a gas.

Ammonia in Solution: Ammonia readily dissolves in water to form ammonium hydroxide (NH4OH), a solution commonly known as aqueous ammonia. This solution is often used in various industrial and household applications.

Chemical Properties: Ammonia is a weak base and can act as a nucleophile in chemical reactions. It can react with acids to form salts, and it can also participate in substitution, addition, and redox reactions.

Uses: Ammonia has numerous applications in various industries. It is commonly used in agriculture as a fertilizer due to its high nitrogen content. It is also used in the production of various chemicals, including fertilizers, plastics, explosives, and cleaning agents. Additionally, ammonia is used as a refrigerant in industrial refrigeration systems.

Safety Considerations: Ammonia is toxic and can cause irritation to the respiratory system, eyes, and skin. Inhalation of high concentrations of ammonia vapor can be harmful, and direct contact with liquid ammonia can cause burns. Proper precautions should be taken when working with or handling ammonia, including adequate ventilation and the use of protective equipment.

### Basic Info.

DOT Class	2.3 & 8	Un Number	1005
Cylinder Standard	DOT/ISO/GB	Cylinder Pressure	3MPa/15MPa/20MPa
Valve	Qf-10/Diss720	Melting Point	-77.7 ºC
Appearance	Colorless, Strong Pungent Odor	Boiling Point	-33.5 ºC
Density	0.73 Kg/M3	Molecular Weight	17.04
Transport Package	47L, 100L, 800L	Specification	99.8%, 99.999%
Trademark	СМС	Origin	China
HS Code	28141000	Production Capacity	20000 Tons /Year

Product Name	Ammonia
Chemical Formula	NH3
Hazard Class	2.3
Molecular Weight	17.031
UN	1005
Boiling Point(°C)	-33.43
Boiling Point(°F)	-241.17
Density(kg/m³)	0.728
Density(lb/ft³)	0.044

### rocess:

Industrial ammonia is purified by a filter into the electronic grade ultra-high purity ammonia. The annual output of ultra-high purity ammonia gas in Jinhong is more than 10,000 tons.

### Specification:

 S-cylinder: 44L/47L
 Valve: CGA660
 Content: 21Kg

 Y-cylinder: 440L
 Valve: DISS720
 Content: 230Kg

 T-cylinder: 930L
 Valve: DISS720
 Content:480Kg

 ISO tank: 22.5Nm³
 Valve:1""VCR"
 Content:11.2T

# Application:

Ammonia(NH3)is used in

1. metal treating operations as nitriding, carbo-nitriding, bright annealing, furnace brazing, sintering, sodium hydride descaling, atomic hydrogen welding, and other applications where protective atmospheres are required

2. hydrogenation of fats and oils as a convenient source of hydrogen

3.manufacturing of alkalis, ammonium salts, dyes, pharmaceuticals, cuprammonium rayon, and nylon

4. rubber industry for stabilization of raw latex to prevent coagulation during transportation and torage

5. as a catalyst in the phenol-formaldehyde condensation and also in the urea-formaldehyde condensation to make synthetic resin

6.produce proteins and can be used to improve the protein content of low quality hay

7.semiconductor industry

8.production of blue and white LEDs (Light Emitting Diods)

9.In the field of novel optoelectronic materials, it is an important base material for GAN preparation by MOCVD technology. High purity ammonia or the preparation of nitrogen trifluoride, silicon nitride, the basic material, is the production of super high nitrogen raw gas. In addition, liquid ammonia is widely used in the semiconductor industry, the metallurgical industry, as well as other industries and scientific research that need to protect the atmosphere.


### **Detailed Photos**







### **Company Profile**

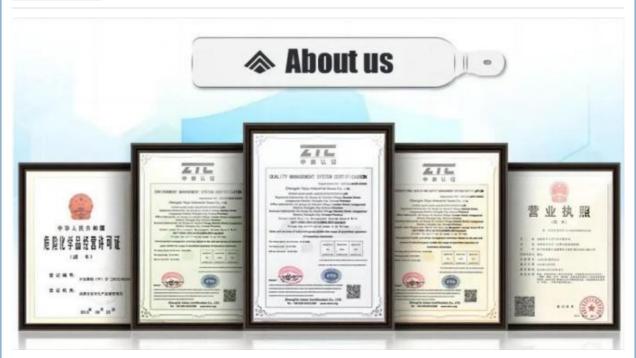

Shanghai Kemike Chemical Co., Ltd is staffed by trained personnel, combine many years experience in Gas industry .We supply cylinder gas, electronic gas, etc., and the gas holder, panel, valves and fittings and other equipment, parts and engineering services to our customers in China and worldwide; The products are involved in various industrial fields, such as semiconductor chip, solar cell, LED, TFT-LCD, optical fiber, glass, laser, medicine, etc., Our mission is to partner with our global customers to provide support, solutions and quality products that are innovative, reliable, and safe.

Our products mainly include: H2, O2, N2, Ar, CO2, propane, acetylene, helium, laser mixed gas, SiH4, Sih2cl2, SiHCL3, SiCL4, NH3, CF4, NF3, SF6, HCL, N2O, doping mixed gas (TMB, PH3, B2H6) and other electronic gases.

CH3F F6+CI2 WF6 SiCl4 NH3 NH3 SiH4 Kr H<sub>2</sub>S

C2 HCI+Ne C3F8 C3F8 **TEOS** CH4 PH<sub>3</sub> SF6 4MS

C4F8 SiH2 CF4

SiF4 **C3H8** CI2

DCE BBr3 **C3H6** 

POCI3 **SO2** N2

BCI3 D2 CO2

SiHCI3

TMB+H2

He +As

Ge+Se

D+B

CO+NO

AsH3 CH2F2 C2H4 C2H2 HBr COS Ar+O2 HF

C2H6 GeCl4 Xe+NO **TMAI** DMZn GeH4 H2Se DEZn **B2H6** 





